Pneumatic pumps for the supply of low and medium viscosity oils and antifreeze for the use in mobile kits or in pipeworks.


STANDARD SERIES

3:1



Single acting - 21 l/min

Art.no. **31267**
Oil



Double acting - 23.7 l/min

Art.no. **31234**
Oil



Double acting - 23.7 l/min

Art.no. **31233**
Oil


Art.no. **31233-130**
IBC 1000 l



Single acting - 16.7 l/min

Art.no. **31231**
Oil

Art.no. **31249**
Pure antifreeze

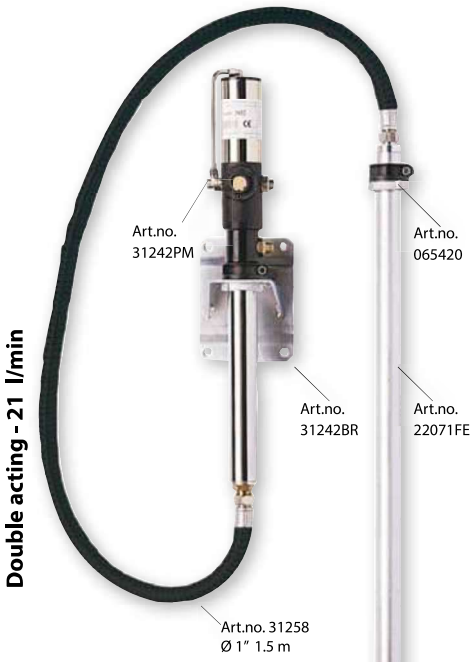

Double acting - 21 l/min

Art.no. **31242**
Oil

Art.no. **31242-130**
Oil IBC 1000 l

Art.no. **31242-A**
Pure antifreeze

Art.no. **31242A-130**
Pure antifreeze
IBC 1000 l

All kits are complete with pump, hose and valve.

Art. no.	31234	31233	31233-130	31231 31249	31242 31242-A	31242-130 31242A-130	31242PM	31267
Compressed air supply	Pressure min 2 - max 8 bar (30 - 116 psi)							
Compression ratio	3:1							
Outlet pressure	24 bar (350 psi)							
Flow rate	23.7 l/min			16.7 l/min	21 l/min			
Connection compressed air	1/4" BSP (F)							
Connection lubricant outlet	1/2" BSP (M)							
Max air consumption with 8 bar pressure	210 l/min							
Length suction tube	750 mm	950 mm	1300 mm	950 mm		1300 mm	380 mm	176 mm
Diameter suction tube	40 mm							
Suitable for drums of	60 l	208 l	1000 l	208 l		1000 l	Any	Any
Weight	5 kg	6 kg	6.2 kg	9 kg	5.2 kg	5.4 kg	4.5 kg	3.7 kg
Dimensions (LxWxH) (mm)	95x95x1070	95x95x1270	95x95x1500	95x95x1270	95x95x530	95x95x1500	95x95x700	95x95x415

The a. m. performance values are based upon the following test conditions: Hydraulic oil ISO 68 at 22°C - Compressed air pressure 8 bar - free flow outlet.